


Baltimore

Technical Specification Sheet

BAL

Wall Mounted

BALTIMORE COMES TOP DUCTED AND CAN BE CONVERTED TO BACK DUCTED ON SITE BY THE INSTALLER.

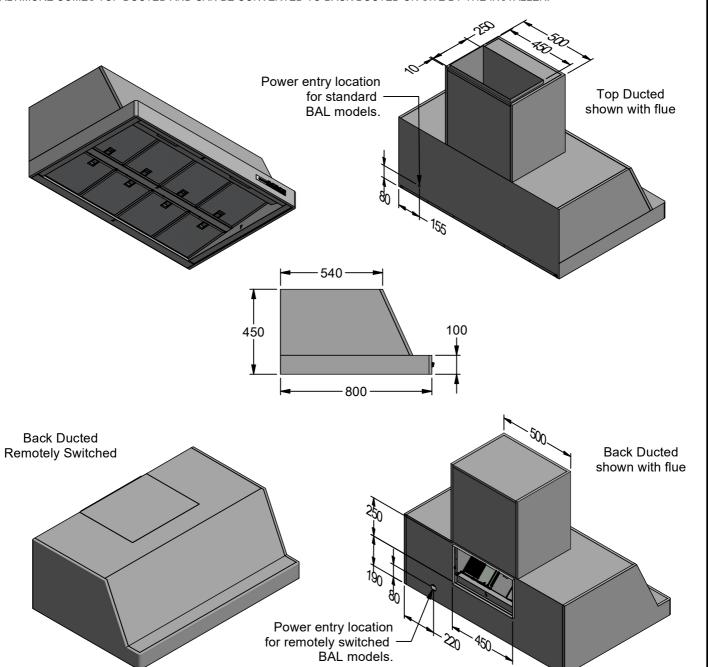

PLEASE NOTE "R" AT THE END OF THE MODEL No. DENOTES REMOTELY SWITCHED FOR REMOTELY SWITCHED MODELS SWITCHING IS NOT SUPPLIED ELECTRICAL CONNECTION IS MADE AT JUNCTION BOX INSIDE RANGEHOOD

Model	BAL 1200L-3 BAL 1200L-3 R	BAL 1500L-3 BAL 1500L-3 R	Model	BAL 1200L-3 BAL 1200L-3 R	BAL 1500L-3 BAL 1500L-3 R
Body Width	1200mm	1500mm	Filter Size	272mm x 290mm	459mm x 290mm
Motor Box / Flue Width	500mm	500mm	Conversion Top/Back Back/Top	YES	YES
Motor Qty	3	3	Electrical Connection	Junction Box	Junction Box
LED Light	Cool	Cool	Minimum Height (H =)	N/A	N/A
Nightlight	NO	NO	Maximum Height (H =)	N/A	N/A
Light Qty	2	3	PowderKote ® Available	N/A	N/A
Light Centres	545mm	459mm	All-thread Fixing Centres	N/A	N/A
Filter Qty	8	6	Corner Type	Round	Round
WM-xy** Series			Condari Pty Ltd.	Version: J 07/04/2022F	Page 1 of 1